


# Machinery Space Section Valve NS-12

TECHNICAL DATA SHEET K0008935 REVISION A DATE: 01 Mar 2013

Product	Valve Type	Voltage	Water Pipe O.D. (mm)	
			Inlet	Outlet
D01550.3	SVM 12-ANN-S16/16-10-M	24 VDC	16,0	16,0

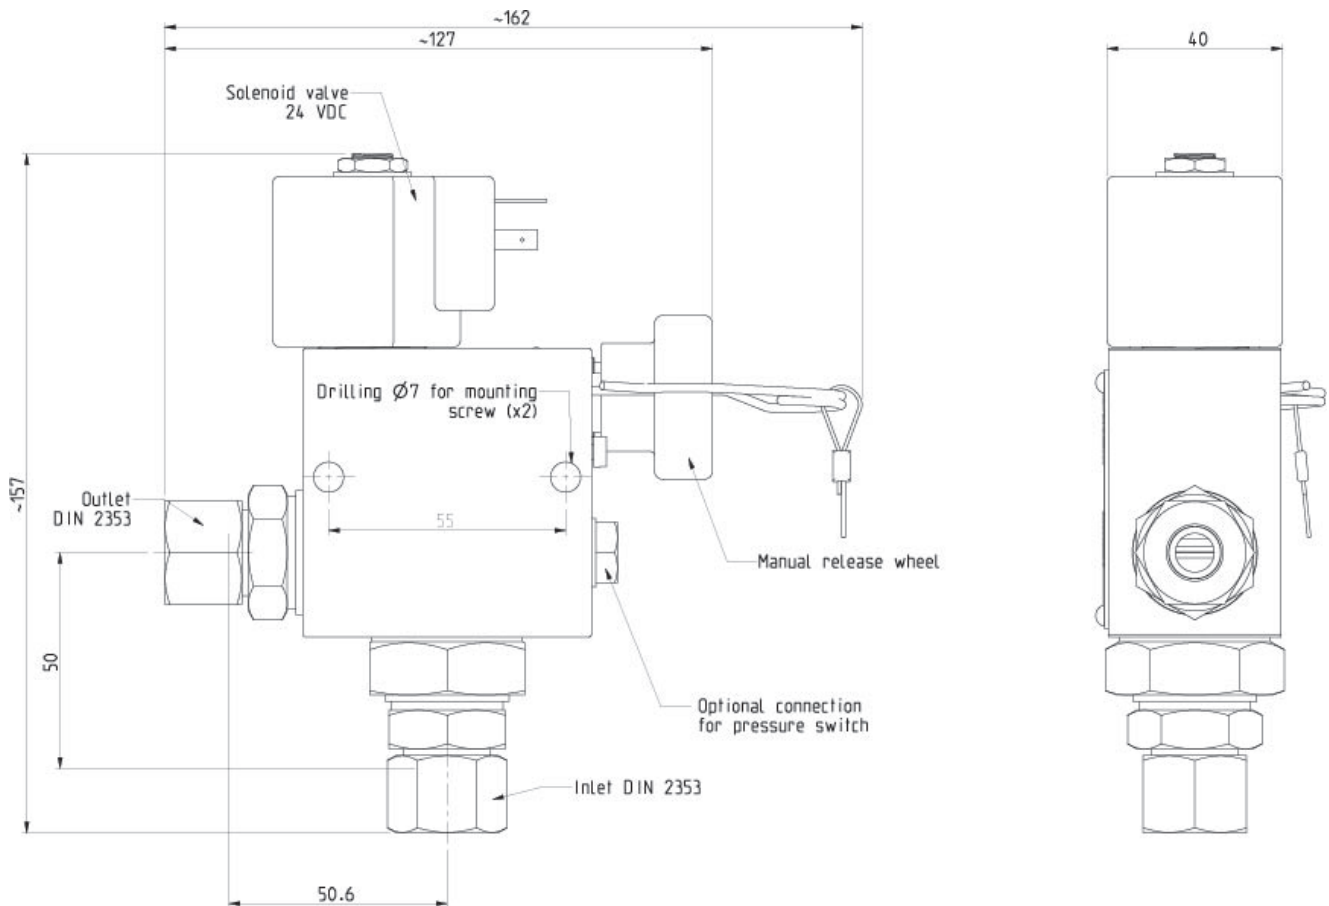

# Machinery Space Section Valve NS-12

## Description

The Machinery Space Section Valve is used to control the spray head system activation. In case of fire, the Machinery Space Section Valve is opened by the remotely-operated solenoid or by opening the Manual Release Valve.

In order to open the Machinery Valve, either the solenoid or the Manual Release Valve can be used. To close the Machinery Valve, it is essential to ensure that both the solenoid and the Manual Release Valves are closed, as they operate the Machinery Valve independently. After closing the Machinery Space Section Valve, a small leakage may occur as the pressure is stabilizing.

<b>General</b>	Body material	Brass
	Nut material	Zinc-coated steel
	Connections	Cutting ring DIN2353
	Valve function	Normally closed
	Solenoid function	Closed when electric circuit to solenoid valve is open
	Mass	~2.0 kg
	Maximum pressure	200 bar

