


Solenoid Actuator Valve

Stock code D21072

TECHNICAL DATA SHEET TD7800 REVISION A DATE OF ISSUE 18 Mar 2014

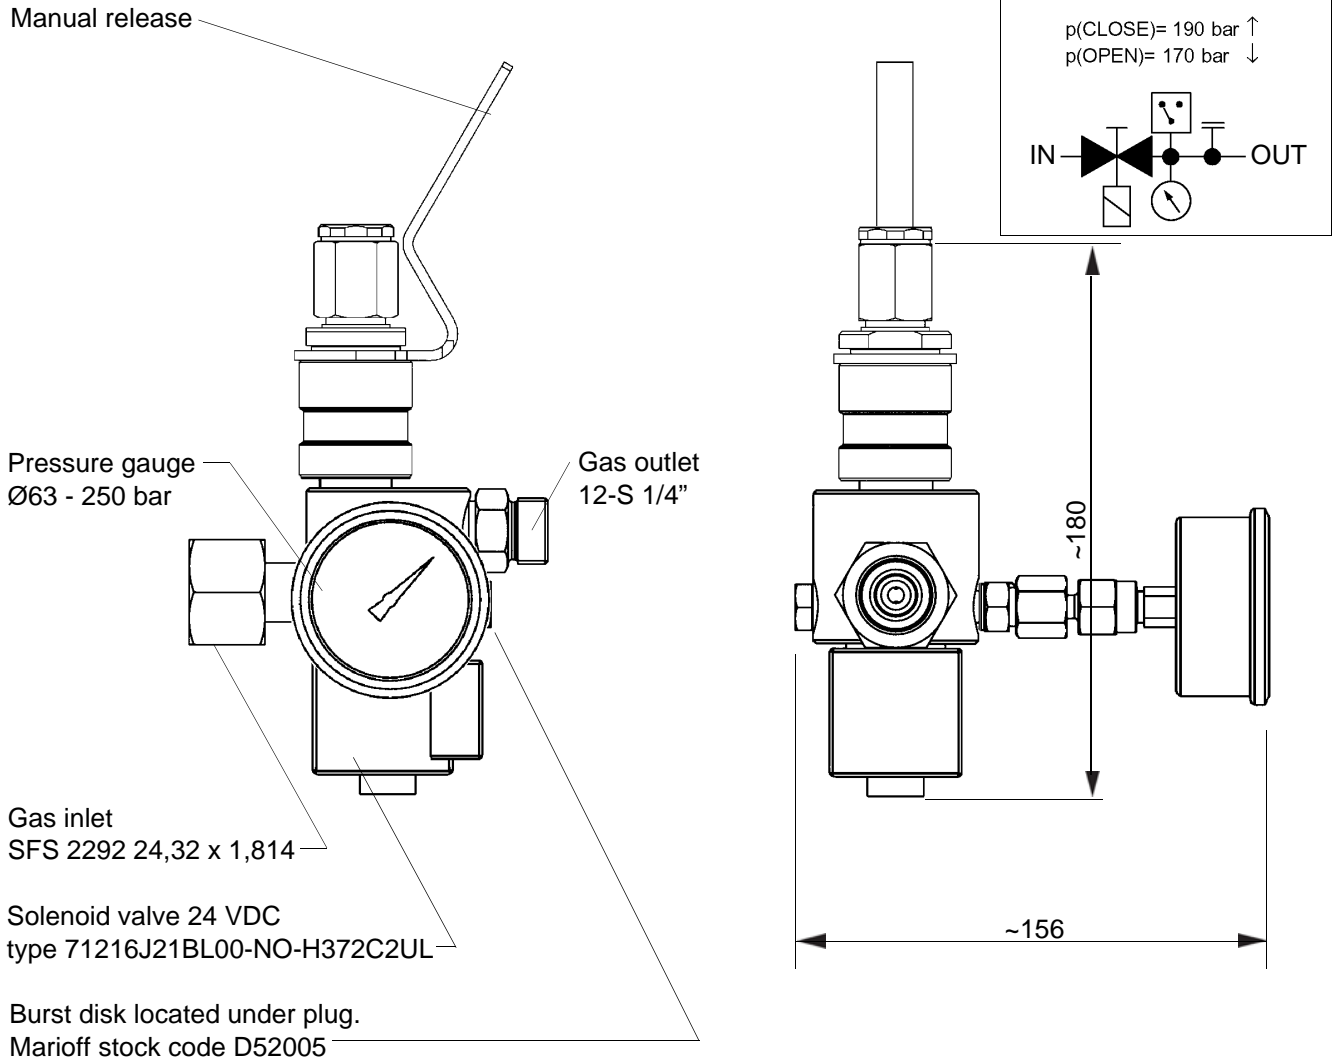

General	Body material	Brass, nickel plated
	Electric voltage	Solenoid valve 24 V DC (for hazardous areas)
	Max. working pressure	200 bar
Operation	<p>The valve is normally connected directly or via an adapter to an air or nitrogen cylinder. It is used to release the contents of the cylinder into a GPU, a water accumulator unit (MAU, DAU, KAU, ...) or an MT3 system or equivalent.</p> <p>Solenoid actuator valve is released either electrically or manually to allow the gas flow to the piping system.</p> <p>To monitor the gas cylinder pressure, the valve is equipped with a pressure gauge. Once released, the valve remains open as long as the valve is pressurised.</p>	