

### FEATURES

- **Acceptable for Use in the City of Chicago (Chicago Fire Department Approved)**
- **UL Listed**
- **FM Approved**
- **City Disconnect Keyswitch Provides Extra Redundancy**
- **Easy-to-Read Front Panel**
- **Compact Design**
- **Conduit Knockouts Provided**
- **Easy Access to Field Wiring Inside Keyed Door**
- **Kits include Control Unit with Dead Front Cover**

### DESCRIPTION

The ARIES NETLink system provides a Stand-Alone Control Box designed specifically for installation in the City of Chicago. The front panel includes a City Disconnect Key Switch with two positions: Normal and Disconnected. Turning the key switch to the “Normal” position connects the ARIES NETLink control unit to the City Tie circuit. Turning the key switch to the “Disconnected” position disconnects the ARIES NETLink control unit from the City Tie circuit. A prominently-displayed white Pilot Light illuminates when the circuit is disconnected.

A bell may be connected to sound when the control unit enters a Fire Alarm Trouble state. A bell may also be connected to sound when the City Tie circuit becomes disconnected (City Tie Trouble state). Bells are not included.

Field wiring is hidden inside a keyed door. All field wiring connections are made via terminal blocks with screw-type terminations capable of connecting up to #12 AWG solid conductors. Each terminal is clearly numbered for visible identification.

### SPECIFICATIONS

- **Dimensions:** 17.5 in.(L) x 8.75 in.(W) x 4.375 in. (D)
- **Electrical:**
  - Operating Voltage: 24 Vdc nominal
- **Environmental:**
  - 32° to 122° F (0° to 50° C)
  - 0-93% RH, non-condensing



Figure 1. City of Chicago Stand-Alone Control Box

### ORDERING INFORMATION

Part Number	Description
<b>ARIES NETLink SYSTEMS</b>	
76-800500-001	City of Chicago Stand-Alone Control Box
76-800102-001	City of Chicago ARIES NETLink 3-Tiered Kit (consists of ARIES NETLink 3-Tiered Control Unit, City of Chicago Dead Front Cover, City of Chicago Stand-Alone Control Box and mounting hardware)
76-800202-001	City of Chicago ARIES NETLink 2-Tiered Kit (consists of ARIES NETLink 2-Tiered Control Unit, City of Chicago Dead Front Cover, City of Chicago Stand-Alone Control Box and mounting hardware)

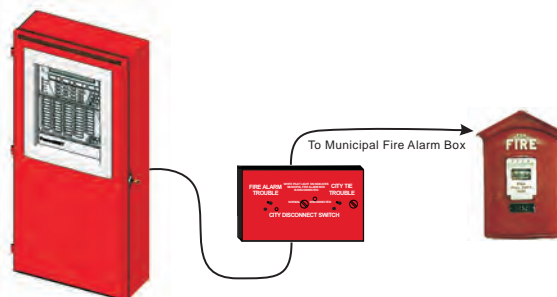


Figure 2. Typical Configuration

Kidde is a registered trademark of Kidde-Fenwal, Inc.  
ARIES NETLink is a trademark of Kidde-Fenwal, Inc.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular question, contact KIDDE-FENWAL, INC., Ashland, MA 01721.

Kidde Fire Systems  
400 Main Street  
Ashland, MA 01721  
Ph: 508.881.2000  
Fax: 508.881.8920  
www.kiddefiresystems.com