

3- Way Directional Valve Pressure Regulator

FEATURES

- Factory Set Outlet Pressure of 116 PSIG (8 bar)
- For Use With Pneumatic 3-Way Directional Valve Operation
- UL Listed, File Number 4674
- FM Approved
- RoHS Complaint

P/N: 38-509803-001(KIT)
06-118334-001(REGULATOR ONLY)

DESCRIPTION

Use this Kidde Fire Systems Fire Suppression System pressure regulator to reduce the pressure coming from the nitrogen pilot cylinder going to the 3-way directional valve. The service pressure of the nitrogen pilot cylinder starts at 1800 PSIG at 70°F (124 bar at 21°C). Once the nitrogen pilot is discharged, the nitrogen pressure must be reduced between 100 to 150 PSIG (7 to 10 bar) in order to operate the pneumatic solenoid (P/N 06-118329-001). The pneumatic solenoid is mounted to the actuator of the 3-way directional valve. The pressure regulator is preset to release the nitrogen pressure through the line to approximately 116 PSIG (8 bar).



MONTHLY MAINTENANCE:

Inspect fittings and assembly for cracks, corrosion, grime, etc. Ensure that the fittings are tight and that the pressure regulator is tightly secured to the nitrogen line. If any defects are found during the monthly inspection, immediately contact an authorized Kidde Fire Systems Distributor to service the systems.



Do not use this pressure regulator with the 2-Way Selector valves.

INSTALLATION

The pressure regulator is labeled with an inlet and an outlet; take note to the appropriate orientation prior to installing the regulator in the nitrogen line, down stream of the nitrogen pilot cylinder. Use the following procedure to install the pressure regulator:



A pressure regulator must be installed in line from the nitrogen pilot in order for the pneumatic solenoid to operate properly. The pneumatic solenoid could be damaged if the manufacturer's maximum pressure recommendation of 150 PSIG (10.34 bar) is exceeded.

1. Apply tape dope to the 1/4-inch NPT male threads of the inlet and outlet connections.
2. Secure pressure regulator to nitrogen pilot line, being sure the outlet is in line, upstream of the pneumatic solenoid.
3. It is recommended that the pressure regulator be mounted to a fixed structure to minimize vibration and to avoid damage to unit during discharge.


ORDERING INFORMATION

Part Number	Description
06-118334-001	Pressure Regulator only
38-509803-001	Pressure Regulator Kit

SPECIFICATIONS

MATERIALS:

Body–	Nickel Plated Brass
Inlet Pressure Max–	5150 PSIG at 130°F (355 bar at 54°C)
Outlet Pressure–	116 PSIG (8 bar)
Safety Regulator–	145 PSIG (10 bar)
Temperature Range–	-20°F to 130°F (-29°C to 54°C)
Weight–	1.5 lb. (0.68 kg)

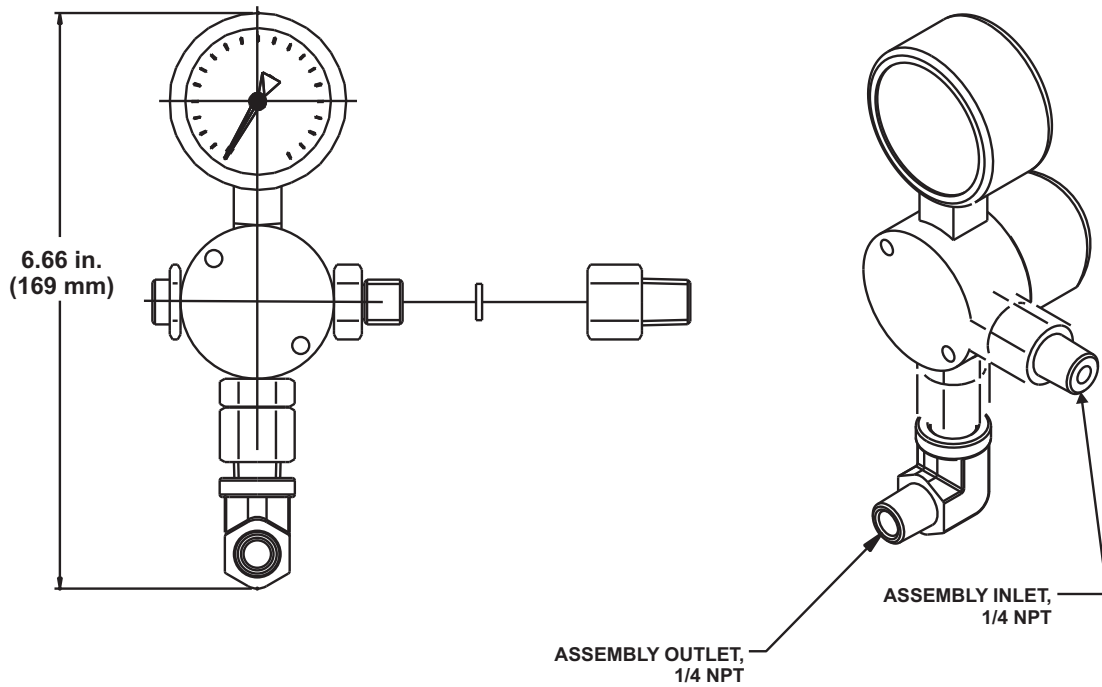

Pressure Relief Dimensions

COMPATIBILITY

Series	DIOM P/N	Approvals
Kidde Fire Systems ECS-500™ System	06-237585-001	UL, ULC, FM
Kidde Fire Systems ADS™ for use with Fluoroketone Fire Suppression Agents	06-237256-001	UL, ULC, FM
Kidde Fire Systems ECS™ 360 for use with Fluoroketone Fire Suppression Agents	06-236553-001	UL, ULC, FM
Kidde Fire Systems ADS™ with HFC-227ea Agent	06-236068-001	UL, ULC, FM

EXPORT INFORMATION (USA)

Jurisdiction: EAR

Classification: EAR99

This document contains technical data subject to the EAR.

All trademarks are the property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. believes this data to be accurate, but it is published and presented without any guarantee or warranty whatsoever. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The fire suppression system design, installation, maintenance, service and troubleshooting must be performed by trained, authorized Kidde Fire Systems distributors for the product to work correctly. If you need more information on this product, or if you have a particular problem or question, contact: KIDDE-FENWAL, INC., Ashland, MA 01721 USA, Telephone: (508) 881-2000.