


## Flexible Discharge Hose

### FEATURES

- For Approvals, see the “COMPATIBILITY” table on page 2.

P/N: WK-28389X-000

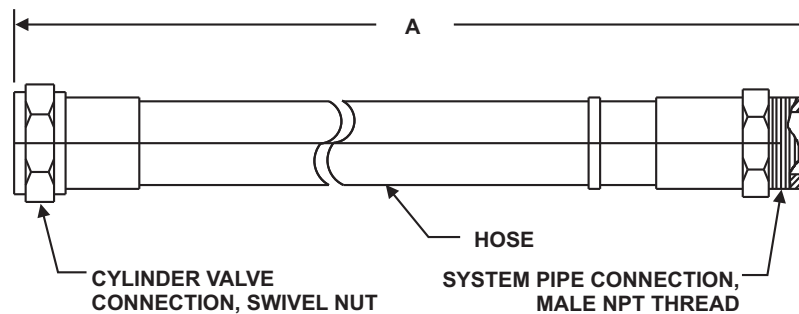

### TECHNICAL DATA

- Minimum Bursting Pressure: 2000 PSI (137.9 bar)
- Working Pressure: 500 PSI (34.5 bar)
- Proof Pressure: 1000 PSI (68.9 bar)
- Minimum Bend Radius
  - WK-283898-000: 20 in (508 mm)
  - WK-283899-000: 25 1/2 in (648 mm)

### MATERIALS for WK-283898-000

- Hose: Reinforced Rubber Hose
- Fitting: Plated Steel

### MATERIALS for WK-283899-000

- Hose: Reinforced Rubber Hose
- Fitting: Plated Steel

### ORDERING INFORMATION

Part Number	Hose Size	Thread/ Outlet	Dimension A	Min. Bend Radius	Fittings Material
WK-283898-000	1-1/2 in (40 mm)	NPT	24 in (610 mm)	20 in (508 mm)	Plated Steel
WK-283899-000	2 in (50 mm)	NPT	31 in (787 mm)	25 1/2 in (648 mm)	Plated Steel

## COMPATIBILITY

Series	DIOM P/N	Approvals
Kidde Fire Systems ECS-500™ System	06-237585-001	UL, ULC, FM
Kidde Fire Systems ECS-500™ Marine System	06-237589-001	UL, ULC, USCG
Kidde Fire Systems ECS™ 360 for use with Fluoroketone Fire Suppression Agents	06-236553-001	UL, ULC, FM
Kidde Fire Systems ECS™ 360 Marine for use with Fluoroketone Fire Suppression Agents	06-236559-001	UL, ULC, USCG
Kidde Fire Systems ECS™ 360 with HFC-227ea Agent	06-236115-001	UL, ULC, FM
Kidde Fire Systems Modular ECS™ 360 with HFC-227ea Agent	06-236116-001	UL, ULC, FM
Kidde Fire Systems ECS™ 360 Marine with HFC-227ea Agent	06-236225-001	UL, USCG

### EXPORT INFORMATION (USA)

Jurisdiction: EAR  
Classification: EAR99

This document contains technical data subject to the EAR.

All trademarks are the property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. believes this data to be accurate, but it is published and presented without any guarantee or warranty whatsoever. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The fire suppression system design, installation, maintenance, service and troubleshooting must be performed by trained, authorized Kidde Fire Systems distributors for the product to work correctly. If you need more information on this product, or if you have a particular problem or question, contact: KIDDE-FENWAL, INC., Ashland, MA 01721 USA, Telephone: (508) 881-2000.